



SLAB5826

Smart Long-Range Antenna Bridge

With 26dBi Patch Antenna


Solution Package Features

This All-in-One TT™5800 w/26dBi Patch Antenna Integrated solution includes: 5.8GHz high-power 802.11a radio & antenna integrated mounting hardware, power-over-ethernet interface and power supply.




All-in-One
Item# 11-151

Azimuth Radiation Pattern

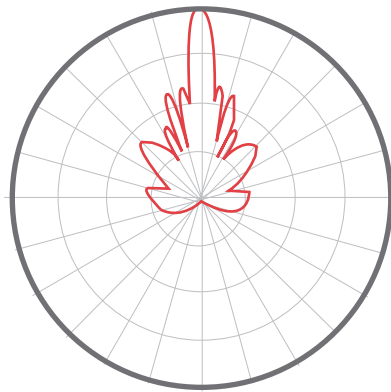

Elevation Radiation Pattern

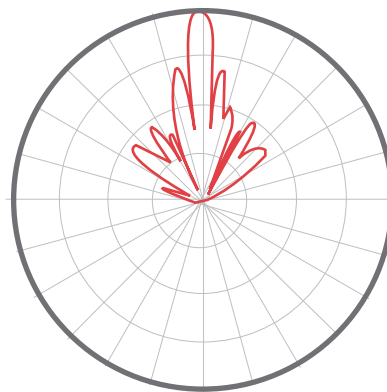

Features:

- Web & SNMP based Management
- Intra-BSS traffic blocking (Layer 2 Isolation) * for AP Mode
- Adjustable Transmit (TX) Power
- VLAN Transparent Support
- Configurable ACK timeout for long distance

Antenna Specification

Frequency Range:	5.15 - 5.875 GHz
Gain:	26 dBi
Maximum Input Power:	6W
Polarization:	Vert/Hori.
AZ/EL Beamwidth:	6°
Front to Back Ratio:	-30 dB (max)
VSWR 50 Ohm:	1.7:1
Wind Load:	220 km/h
Size:	17" x 17" x 3"
Combined Weight:	11 lbs (with radio)
Connector:	Outdoor RJ-45 (All-Weather)
Mounting Kit/Style:	Included: Pole Mount
Operating Temperature:	-40°C to + 70°C
Material:	ABS
Additional Features:	Broadband Antenna

Radio TT™5800 Specification

Standard Compliance:	IEEE 802.11a
Modulation:	OFDM w/BPSK, QPSK, 16 QAM, 64 QAM
Frequency Band:	5.725 - 5.850 GHz
Data Rate: (Mbps)	54, 48, 36, 24, 18, 12, 9, and 6 Mbps
Output Power: (300mW)	25 dBm (+/- 3dB) @ 6/9/12/18/24 Mbps 24 dBm @ 36 Mbps 23 dBm @ 48 Mbps 20 dBm @ 54 Mbps
Receive Sensitivity:	-90 dBm ≤ 6 Mbps / -72 dBm ≤ 54 Mbps
RF Channels:	Total of 5 Non-overlapping channels
Data Security:	WPA, WPA2 & 64/128 bit WEP Data Security
Signal Indicator:	5 Ultra Bright LEDs
DC Power Input:	48VDC Adapter, PoE with Surge Protection, IEEE 802.3af compliant
Operating Environment:	-40°C to + 70°C
Utility:	WATCHDOG